
A WORK OF ART. POWERED BY AIR®



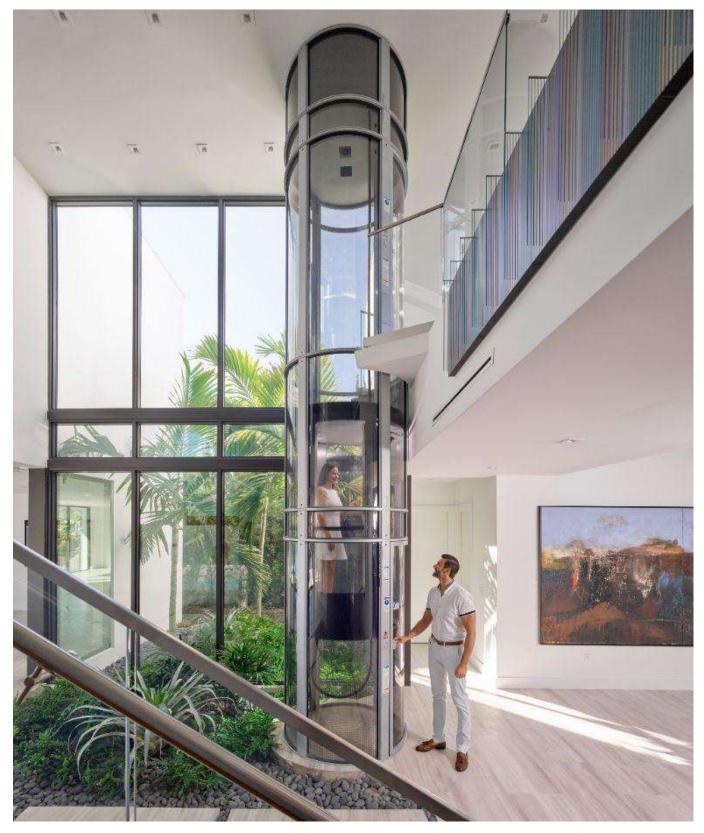

VE - PNEUMATIC VACUUM ELEVATORS

BIG IDEAS

WORI

OLUTIONIZE

www.VacuumElevators.com



Founded in 2002, Pneumatic Vacuum Elevators, LLC (PVE) is the inventor and sole manufacturer of the world's only Air-Driven Home Elevator, the Pneumatic Elevator.

Powered by the most abundant resource in the world, AIR, Pneumatic Elevators are innovative, space-saving home lift solutions that have revolutionized the way people and goods are transported vertically in their homes.

Using Pneumatic Technology® to generate lift, these self-supporting, panoramic elevators smoothly move between floors while requiring much less space, energy & maintenance when compared to traditional elevators.

With three models to choose from, ranging from a single passenger to a three passenger wheelchair-accessible model, Pneumatic Elevators simply rest on the existing ground floor, offering an ease of installation while providing an aesthetically pleasing solution for both retro-fit & new construction projects.

20,000+ Units Installed

PVE | 2

Celebrating over 20 years in business, PVE is an innovative, technology driven company that thinks outside of the box, having our customers always in mind and our engineering capabilities second to none.

Utilizing materials and components of the highest quality available, Pneumatic Elevators unique design is based around our patented technology and PVE is proud to manufacture fully certified, safe and reliable home elevators for use worldwide.

Manufactured in Miami, Florida, USA, PVE has over 20,000 successful installations worldwide in over 100 countries. With subsidiaries in Europe and India, PVE partnered with authorized distributors across the globe to ensure all end users the best quality of installation and service for their home elevators.

100+

Countries



System of Operation For The Pneumatic Elevator

1. During ascent, the system extracts air from the top, creating a vacuum that makes the elevator car go upwards.

> 2. For descent, the intake of air is controlled, causing the car to smoothly move downwards due to gravity.

Pneumatic Technology® simplifies the operation while reducing wear and tear of components: a smooth, safe & reliable system.



Components

There are three main components to the transparent, self-supporting Pneumatic Elevator:

Exterior Cylinder - Made up of an aluminum frame and polycarbonate panels that offers panoramic visibility.

Elevator Car - Fully welded and enclosed cabin made of steel, which houses the brake and safety mechanisms along with the proprietary seal located on top of the car.

PVE Machinery - Installed on top of the upper floor cylinder or remotely located. Houses the turbine motors, valves and PVE controller used to operate the elevator.

pve_® Innovative **Solution**

By using Pneumatic Technology® to generate areas of higher and lower pressure within the cylinder hoistway, Pneumatic Elevators combine a vertical cylinder with a fully enclosed car that smoothly moves up and down through air suction and gravity.

What advantages do Pneumatic Elevators offer?


Not requiring a pre-construction shaft, pit or machine room, Pneumatic Elevators simply rest on the existing ground floor, offering more flexibility of installation while optimizing space within the home.

With minimal pre-construction requirements, Pneumatic Elevators are quick & easy to install with installations being completed in as little as 2 - 3 days.

A plug & play system requiring a 220 volt power supply, these eco-friendly elevators utilize very few moving parts during operation and have minimal maintenance requirements with no harmful oils, gases or lubricants utilized for operation.


Certified for up to 5 stops or 50 feet in total rise, Pneumatic Elevators are custom built to the height of each home with three different sizes available to meet your projects spatial and installation requirements.

OUR TECHNOLOGY



Air Intake **PVE** Machinery Gravitv Atmospheric Pressure Zone

Descent

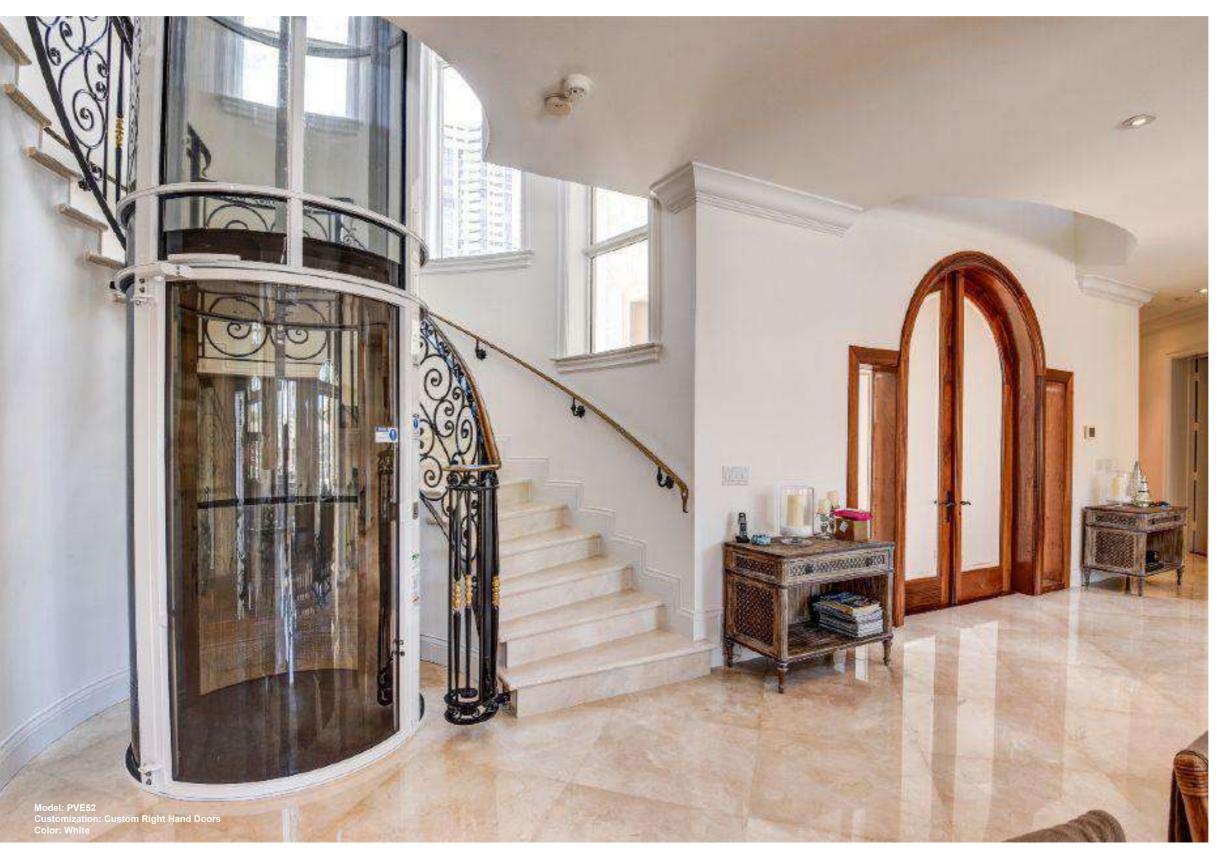

Elegant Design

At PVE, our mission is to create home elevator solutions in which design and technology coincide. Where the utilization of attractive materials and the application of fundamental physics combine to produce an innovative & aesthetically pleasing elevator that enhances homeowners standard of living.

The result: Pneumatic Elevators.

With its minimal footprint, modern design & revolutionary technology, these eco-friendly elevators go where other home elevators simply cannot.

A versatile solution that fits into even the tightest of spaces, all three Pneumatic Elevator models are self-supporting with minimal pre-construction requirements allowing a faster & more flexible installation.

Utilizing a unique, circular design, these panoramic elevators offer 360° degree visibility while traveling up to 5 stops or 50 feet in total rise making them beautiful additions to any residence.

"Green Elevators" that operate using Pneumatic Technology®, minimal energy consumption is utilized during ascent and gravity is simply used for descent ensuring Pneumatic Elevators have a nominal impact to your annual electrical usage.

www.VacuumElevators.com

Model: PVE30 Color: Anodized Silve

Absolute Safety

Pneumatic Elevators are annually certified & safety inspected by the prestigious Liftinstituut, one of the world's leading elevator certification organizations.

In the event of power failure while in operation, the Elevator Cab will automatically descend to the lowest level and the mechanical door lock opens to allow passengers to exit.

Unlike other foreign manufactured products on the market, Pneumatic Elevators are manufactured in Miami, Florida, USA ensuring each elevator produced by PVE meets the strictest quality & safety standards.

The safety of our customers is paramount, with every Pneumatic Elevator pre-assembled & safety tested at our PVE Factory Headquarters prior to installation.



ADVANTAGES

REMAIN IN THE **COMFORTS OF** YOUR HOME

Made In U.S.A


3 Models Available

With 3 Models Available, There Is A Pneumatic Elevator To Fit Any Projects' Needs.






PVE30



Single Passenger Elevator 30 inches (750 mm) External Diameter


350 lbs Lift Capacity (159 kg) 40 ft/min Traveling Speed Automatic Interior LED Lighting & Fan In-Line Door Openings

PVE37



Two Passenger Elevator 37 inches (950 mm) External Diameter

450 lbs Lift Capacity (205 kg) 40 ft/min Traveling Speed Automatic Interior LED Lighting & Fan In-Line, Walk-Through & 90° Door Openings* *Limitations With 90° Door Openings



Three Passenger Elevator Wheelchair Accessible 52 11/16 inches (1,338 mm) External Diameter 525 lbs Lift Capacity (238 kg) 35 ft/min Traveling Speed Automatic Interior LED Lighting & Fan In-Line & Walk-Through Door Openings

PVE Model Specifications

pve.30 **pve**.37 **pve**.52

General	
Maximum Load (lbs)	350
Speed	40 fpm (
Number of Stops	2 to
Maximum Distance (Feet)	50

Inside Diameter Widest Point (Inches)	
Doorway Width (Inches)	
One-Touch Operation	
Wheelchair Accessible	

Available Entrances **	
Possibility of an Automatic Door	

Power Alarm

General			
Maximum Load (Ibs)	350	450	525
Speed	40 fpm (.15 m/s)	40 fpm (.15 m/s)	35 fpm (.15 m/s)
Number of Stops	2 to 5	2 to 5	2 to 5
Maximum Distance (Feet)	50	50	50
Car			
iameter Widest Point (Inches)	25"	32" 1/2	46" 3/4
Doorway Width (Inches)	20"	20" 1/2	32"
One-Touch Operation	Yes	Yes	Yes
Wheelchair Accessible	No	No	Yes
Doors			
Available Entrances **	0°	0°, 90°, 270° and 180°	0° and 180°
ssibility of an Automatic Door	Yes	Yes	Yes
Safety			
er Failure Automatic Descent	Yes	Yes	Yes
m Button / Safety Telephone	Yes	Yes	Yes
Electricity			
Supply	220 V/20 A	220 V/30 A	220 V/40 A
Power	3.8 kW	6 kW	7 kW
Installation Requirements			
Perforation Diameter (Inches)	32"	39"	54" 11/16
eight on Upper Floor (Inches) *	97" *	97" *	97" *

Finished I Minimum Hei

* Lower Height Clearances are possible. Speak to a PVE Sales Representative to confirm the feasibility of your desired installation.

** Door Configuration Options available for review on Page 25.

Specifications For All 3 Pneumatic Elevator Models Available.

PVE | 10





www.VacuumElevators.com

Yacht & Marine Elevator

Easy-To-Install, Space-Saving Elevators For Yacht & Marine Applications:




With it's minimal footprint, panoramic design and ease of installation, Pneumatic Elevators are the ideal elevator solutions for any Yacht & Marine Applications.

With no pre-construction pit, hoist-way or machine room required, each Pneumatic Elevator is custom built to the height of the vessel while adding an elegant design feature that will capture people's attention & imagination.

Door Configurations

Door Configurations Available For Specific Pneumatic Elevator Models:

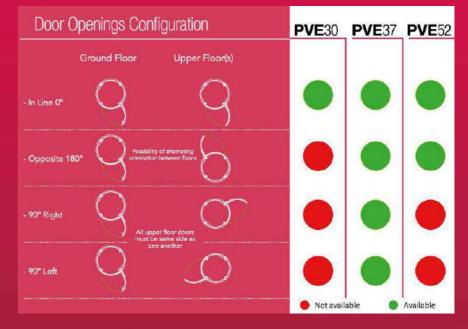

Door Configurations Shown Above Are For Standard Left Hand Door Swings. Only One Door Opening Available Per Floor/Level. Speak with a PVE Sales Representative Regarding Custom Right Hand Door Configurations.

YACHT/MARINE ELEVATOR & DOOR CONFIGURATIONS

OPTIONS & UPGRADES


PVE - PNEUMATIC VACUUM EI


www.VacuumElevators.com

Options & Upgrades

Enhance Your Pneumatic Elevator With These Options & Upgrades Available For All 3 Models:

Powder Coated Color Finishes Available for the Exterior Aluminum Frame Of The Pneumatic Elevator:





Standard Black

Light Gray White

Upgrades Available For The Interior Cabin Of The Pneumatic Elevator:





CABIN USB PORT

SOLAR PANEL

PACKAGE

By Integrating

your Pneumatic

Elevator with

Solar Panels,

your home

elevator will be

powered solely

off renewable

energy

(Solar + Air)

while operating

100% off the grid.

SMART HOME

INTEGRATION

Integrate your

Pneumatic

Elevator with

Smart Home

Devices like

Amazon Alexa

or Google

Home to

operate your

elevator using

voice

commands

and/or Smart

Phones.

CABIN KEY LOCK

(Car Operating Panel) PACKAGE

ELEVATOR UPGRADES

TOP FLOOR EXTENSION

Extend the top of your elevator to terminate 1" inch below the ceiling for a clean aesthetic & finish

EARTHQUAKE BRACKETS

Often installed in seismic zones, Earthquake Brackets allow the Pneumatic Elevator to be bolted to the ground floor.

AFFORDABLE ELEGANCE

Model: PVE37 Upgrades: Split-Color: Dark Gray



OPTIONS & UPGRADES

Color Options

UPGRADES **Anodized Silver Dark Gray** Taupe

In-Cabin Upgrades





PREMIUM COP

IN-CABIN LED HALO CEILING PACKAGE



IBUTTON KEY FOB

Enhance Your Pneumatic Elevator By Including Our Latest Upgrades:

BATTERY BACK-UP PACKAGE

Battery Back-Up Package ensures your Pneumatic Elevator is operable even if the electricity goes out inside your home.

REMOTE CONTROL

Command your Pneumatic Elevator in the palm of your hand with a single click by including our Remote Control. Programmable up to 5 Stops.

HOMING **FEATURE**

Program the cabin for your Pneumatic Elevator to automatically travel to a designated floor after a specific period of time to ensure your cabin is always waiting at a pre-programmed floor after use.

PVE Latest Upgrades

The Latest Options & Upgrades Newly Available For All Pneumatic Elevator Models:



Illuminated Exterior **Door Handle**

With PVE's latest Door Handle design, the Illuminated Handle is an aesthetic upgrade with a blue LED inner lit handle which will remain illuminated while the doors are closed. When handle is pulled, the blue LED light will shut off until door is closed. (Available for all PVE elevator models)



Premium Ceiling Package

Available in either a mirrored or brushed aluminum finish. the Premium Ceiling Package includes 4 frosted, acrylic light panels located in the center of the ceiling which illuminates the elevator cabin.

(Available for all PVE elevator models)



Cabin Handrail

Available in either a single individual handrail or in a sets of 3 handrails, the Cabin Handrail is fixed inside the elevator cabin and offers passengers support to hold on to while traveling.

(Available for all PVE elevator models)

Model Specific Upgrades **Options & Upgrades Available For Specific Pneumatic Elevator Models:**



Cabin Folding Seat

Cabin Folding Seat option offers the ability for a folding seat and a handle to be installed inside the cabin. (Available only for the PVE37 & PVE52 models)

PVE Customizations

Available for all 3 Models, these PVE Customizations Require an **Extended Production Time to Manufacture:**



CUSTOM CLEAR POLYCARBONATE PANELS

Custom Clear Polycarbonate Panels offers a clearer and more transparent finish to your Pneumatic Elevator



CUSTOM RIGHT HAND DOOR SWING

Custom Right Hand Door Swing allows the door to be hinged on the top left corner when facing the Pneumatic Elevator from outside. See drawing above for reference. (All Floors Will Have Same Door Swing On All Levels)*



AUTOMATIC DOOR **OPENER/CLOSER**

Automatic Door Opener/Closer allows the door for your Pneumatic Elevator to be programmed to automatically open & close upon arrival.





An economical addition for balcony mounted installations where the elevator is installed in an open space, a double-height area, in-door mezzanine or a stairwell, our Balcony Landing Attachment covers the space between the elevator and the balcony floor while ensuring ease of entry and exit for the passenger. Manufactured in aluminum and available for all Pneumatic Elevator models, the color of the Balcony Landing Attachment will match the exterior color of the elevator purchased with each landing designed to the exterior diameter of the model.

* Custom Door Configurations/Swings may be feasible depending on layout, model & project requirements. Speak to a PVE Sales Representative to confirm the feasibility of your desired installation.

MODEL SPECIFIC UPGRADES & LANDING ATTACHMENT



90° Degree Door Configurations

90° Degree Door Configuration allows for the upper floor doors to be directed 90° degrees to the left or 90° degrees to the right from the ground floor door. All upper floors must be same side as one another.* (Available only for the PVE37 model)

Balcony Landing Attachment

Remove Construction Costs With PVE's Balcony Landing Attachment:

PVE | 18


SPACE SAVING SOLUTION FOR AN HOME

PVE | 19

www.VacuumElevators.com

PVE Machinery Configurations

Depending On The Available Height In Your Home, There Are Different PVE Machinery Configurations Available For Your Pneumatic Elevator:




STANDARD MOUNT CONFIGURATION

A quick to install, aesthetically pleasing solution, Standard Mounted applications allow for the PVE Machinery to be installed directly on top of the upper-floor cylinder

The simplest solution in terms of installation, Standard Mounted applications are plug & play systems that require a 220 volt power supply to be located directly above or close to the top of the unit.

* Lower Height Clearances are possible. Speak to a PVE Sales Representative to confirm the feasibility of your desired installation.



SPLIT-UNIT MOUNT CONFIGURATION

Designed to accommodate installations with lower overhead clearances, Split-Unit Mounted applications allow for the PVE machinery to be remotely located from the top of the unit.

With both Indoor and Outdoor Split-Unit options, remotely locating the machinery reduces the minimum height required on the top floor with the PVE machinery installed up to 30 linear feet away from the top of the upper-floor cylinder.


Connected to the top of the elevator by two 4" inch PVC pipes or a flex hose alternative, Split-Unit Mounted Applications requires a 220 volt power supply to be located wherever the PVE Controller is installed.

STANDARD MOUNT

PVE Machinery Installed Directly Above The Unit.



PVE Machinery Remotely Located Up To 30 Linear Feet Away From The Top Of The Unit.



STANDARD MOUNT

Included as the base PVE Machinery option for all Pneumatic Elevator orders, a Standard Mounted application allows for the PVE Machinery to be installed directly on top of the upper floor cylinder.

ADVANTAGES


Standard Mounted Machinery

Quick & Easy Installation

Self-Contained, Plug & Play Operation

MINIMUM HEIGHT ON UPPER FLOOR

105" Inches *



STANDARD MOUNT ACOUSTIC

Utilizing audio engineering and sound proofing material to reduce decibel ratings, the Standard Mount - Acoustic upgrade option allows for the PVE machinery to be installed directly on top of the upper floor cylinder.

ADVANTAGES


Decibel Reducing Solution for Standard Mounted **Applications**

Plug & Play System

Easy-to-Install Machinery Option

MINIMUM HEIGHT ON UPPER FLOOR 107" Inches

* Lower Height Clearances are possible. Speak to a PVE Sales Representative to confirm the feasibility of your desired installation



SPLIT-UNIT MOUNT INDOOR

Designed to accommodate installations with lower Overhead Clearances on the top floor, the Split-Unit Mount - Indoor machinery option is an upgrade that allows the PVE Machinery to be installed remotely inside the home.

Connected to the top of the elevator by two 4" inch PVC pipes or a flex hose alternative, the Split-Unit machinery can be installed up to 30 linear feet away from the top of the unit and is often located in attics, adjacent closets or mechanical rooms within the home.

ADVANTAGES

Lower Overhead Clearance Requirements on the Top Floor


Reduction of Decibel Ratings Inside Home

Customizable Positioning of the Split-Unit Machinery Inside the Home.

MINIMUM HEIGHT ON UPPER FLOOR

97" Inches *

PVE | 21



SPLIT-UNIT MOUNT OUTDOOR

Designed to allow the PVE Machinery to be installed externally from the home, the Split-Unit Mount - Outdoor machinery option is an upgrade designed to allow the PVE Machinery to be installed in an exterior setting.

Installed inside a fiber glass enclosure, this PVE Machinery solution is connected to the top of the elevator by two 4" inch PVC pipes or a flex hose alternative and can be installed outside up to 30 linear feet away from the top of the unit.

ADVANTAGES

Lower Floor-to-Ceiling Height Requirement on the Top Floor

Most Efficient Audio Solution for PVE Machinery

Customizable Positioning of Split-Unit Machinery Outside the Home.

MINIMUM HEIGHT ON UPPER FLOOR 97" Inches *

BALCONY WITH LANDING

Balcony

Balcony

Landing

Band


PVE INSTALL

THROUGH-FLOOR

TYPES OF LANDINGS


Different configurations for

a Walkway or Platform.



THROUGH-FLOOR APPLICATION

A finished through-floor hole is made at each level with a finished diameter 2" inches greater than the exterior diameter of the Pneumatic Elevator model. In applications with three, four or five stops, the holes must be perfectly aligned.

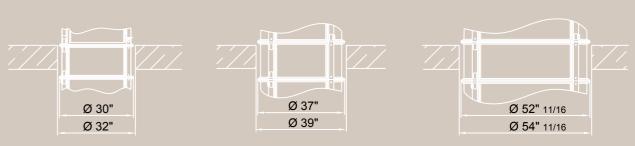

Minimum diameters for finished holes in through-floor installations.

BALCONY LANDING

For a Landing, Platform or Walkway constructed for Balcony Applications, it is recommended that the finished landing at its widest point be 1/2 inch greater than the diameter of the Pneumatic Elevator purchased. Meeting this recommendation will ensure that the Pneumatic Elevator chosen will fit properly, with a clean aesthetic.



BALCONY APPLICATION

When the elevator is installed in an open space, a double-height area, indoor mezzanine or a stairwell where it's not applicable to have a through-floor hole.

BALCONY

EMBEDDED

For Balcony Applications, it's necessary to install a Landing, Platform or Walkway (not provided) at the balcony level for ease of entry & exit for the passenger.

Given the elevators circular design, this pre-construction requirement covers the space between the elevator and balcony floor while ensuring stability as the Pneumatic Elevator is attached to the structure on each level by means of a Balcony Band (provided by the installer).

PVE | 23

INSTALLATION







53" 1/2	2

PANORAMIC VISIBILITY

www.VacuumElevators.com

Notes

ELEVATE YOUR STANDARD OF LIVING



Unique design

-Vacuum lifts

Quick installation (2–3 days) **:**

Minimal maintenance



PVE | 26

NOTES





Customisable finishes



Eco-friendly product



THE ELEVATOR INDUSTRY AWARDS




2018 - WINNER 2019 - WINNER 2020 - RUNNER UP 2023 - WINNER



Pitless installation



Maximum safety

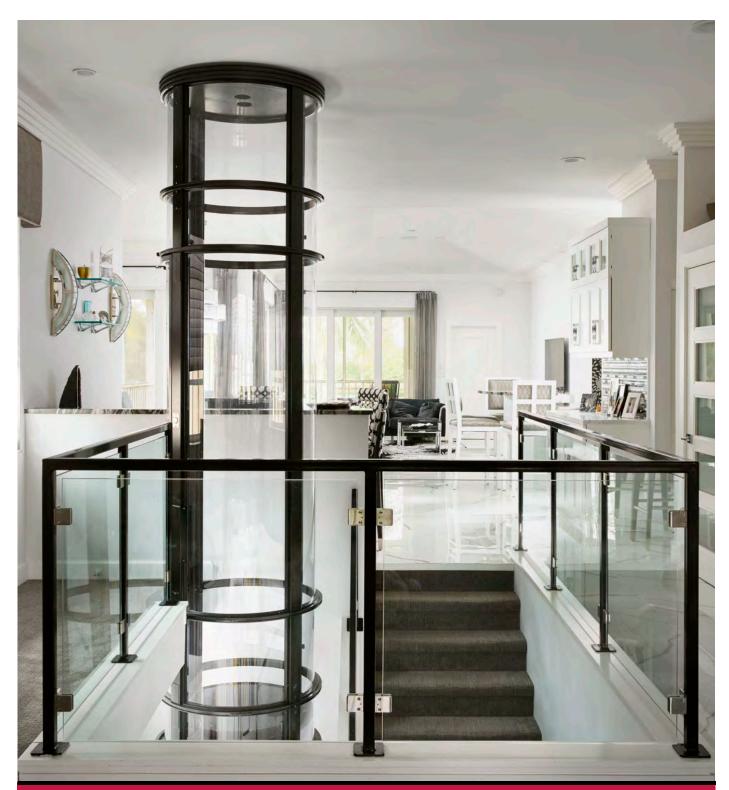



Pneumatic Vacuum Elevators, LLC

4151 West 108th Street, Unit # 1 Miami, FL 33018 USA (305) 884-1091 Info@VacuumElevators.com



www.VacuumElevators.com