




TYPICAL SETUP

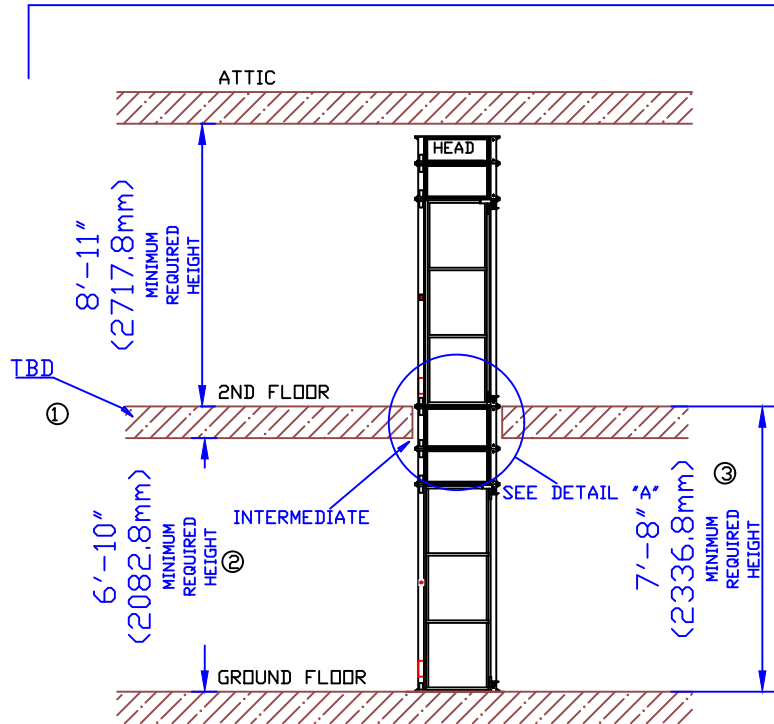

VIEW "A-A"

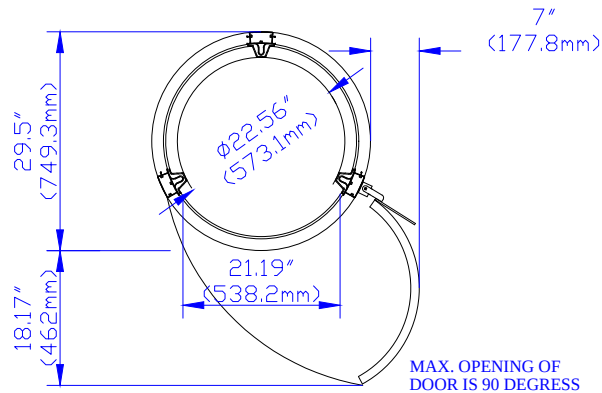

OPTION: REMOTE LOCATION OF HEAD UNIT

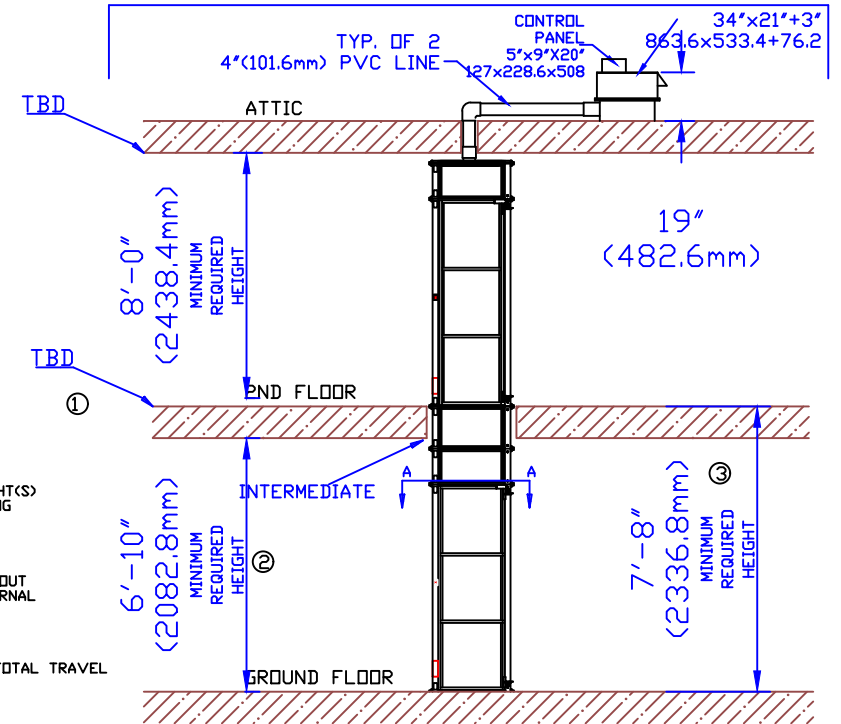


NOTE:

- ① INTERMEDIATE CYLINDER IS CUSTOM MADE AS FLOOR THICKNESS MAY VARY FROM HOME TO HOME.
- ② MINIMUM ALLOWABLE CEILING HEIGHT(S) IS 6'-10" FOR DOOR TO FULLY SWING OPEN
- ③ MINIMUM FLOOR TO FLOOR HEIGHT REQUIRED IS 7'-8"
- ④ INTERNAL DIAMETER OF CABIN WITHOUT THE COLUMNS IS 32" AND THE INTERNAL CABIN HEIGHT IS 6'-7"
- ⑤ DOOR WIDTH IS 21 3/16"
- ⑥ MAX. ELEVATOR HEIGHT IS 50' OF TOTAL TRAVEL

DETAIL "A"

SCALE 2/1
(TYPICAL OF FLOOR PENETRATION)

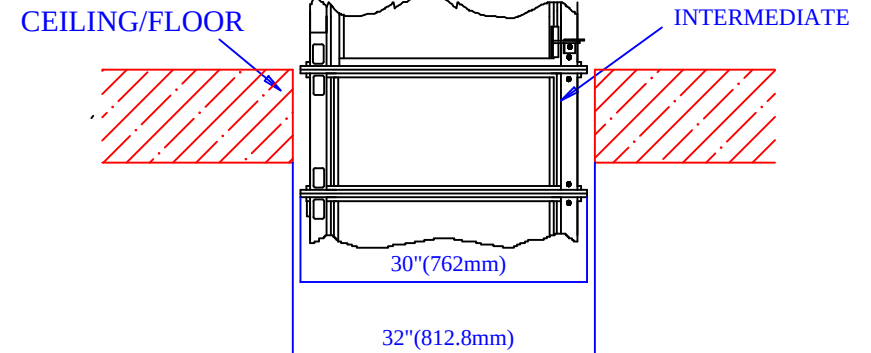

Information contained herein is the property of Pneumatic Vacuum Elevators LLC. No reproduction or disclosure of this information may be made by the recipient to any person or organization without the written consent of Pneumatic Vacuum Elevators LLC.

Item ref.	Quantity	Material	Dimensions	32"	Article No./ Reference
TYPICAL HOME INSTALLATION FOR A 2STOP ELEVATOR					
Designed by		RL	Scale	NTS	Drawing No.
					11/22/19
					Rev
					Date