



TYPICAL SETUP

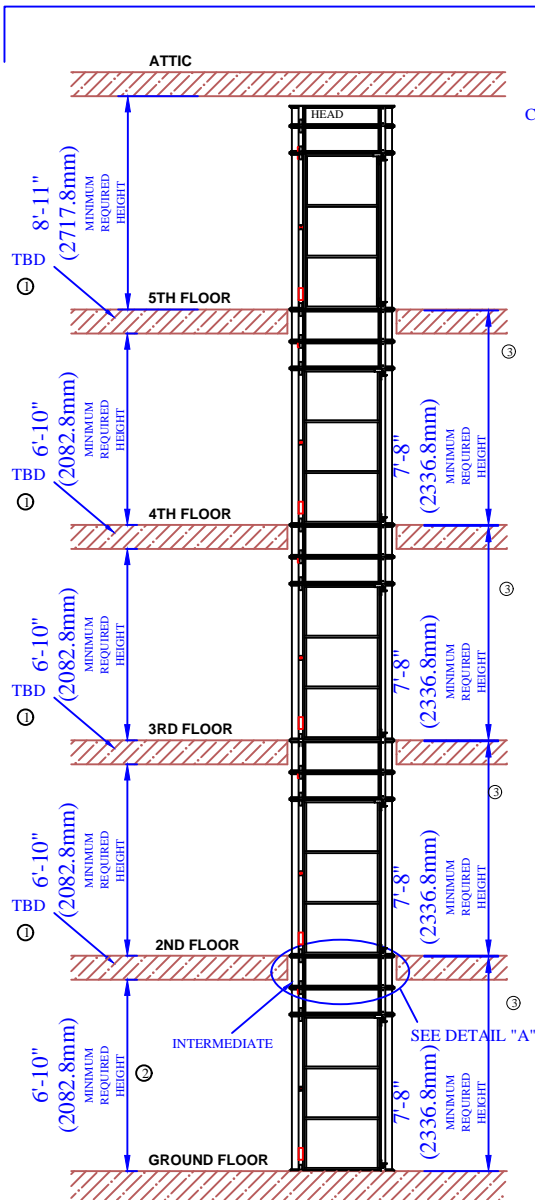

DETAIL "A"

SCALE 3:1
(TYPICAL OF FLOOR PENETRATION)

CEILING/FLOOR

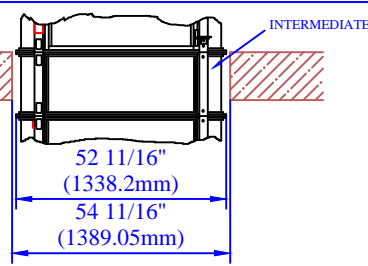


NOTE:


- ① INTERMEDIATE CYLINDER IS CUSTOM MADE AS FLOOR THICKNESS MAY VARY FROM HOME TO HOME.
- ② MINIMUM ALLOWABLE CEILING HEIGHT(S) IS 6'-10" FOR DOOR TO FULLY SWING OPEN
- ③ MINIMUM FLOOR TO FLOOR HEIGHT REQUIRED IS 7'-8"
- ④ INTERNAL DIAMETER OF CABIN WITHOUT THE COLUMNS IS 43 1/2" AND THE INTERNAL CABIN HEIGHT IS 6'-7"
- ⑤ DOOR WIDTH IS 31"
- ⑥ MAX. ELEVATOR HEIGHT IS 50' OF TOTAL TRAVEL

VIEW "A-A"


SCALE 2:1

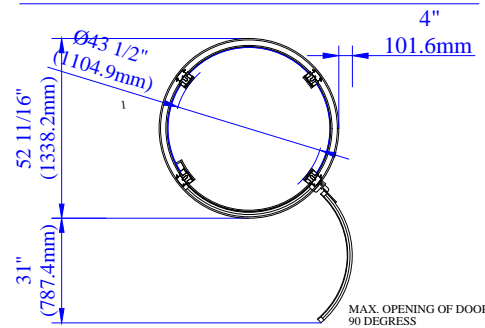

OPTION: REMOTE LOCATION OF HEAD UNIT

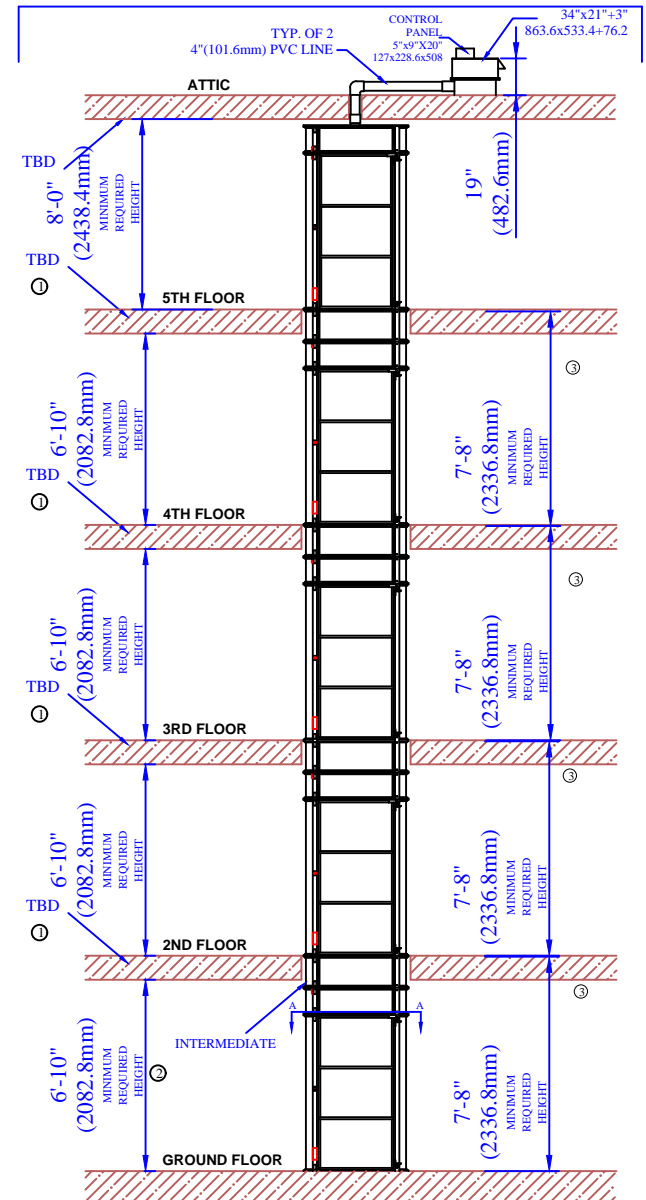

Information contained herein is the property of Pneumatic Vacuum Elevators LLC. No reproduction or disclosure of this information may be made by the recipient to any person or organization without the written consent of Pneumatic Vacuum Elevators LLC.

Itemref.	Quantity	Material	Dimentions		Article No / Reference	
 PNEUMATIC VACUUM ELEVATORS LLC	TYPICAL HOME INSTALLATION FOR A 5STOP ELEVATOR - MODEL PVE52					
	Designed by	Scale	Drawing No.	Rev	Date	
	RL	NTS	D-T52-H-05	0	11/22/19	